

GLASS CUT OUT


Specifications:

Glass thickness: 3/8" (10 mm) to 1/2" (12 mm). Cutout required - Tempered glass only Includes: Gaskets and screws for installation.


BEFORE PROCEEDING WITH FABRICATION, PLEASE ENSURE THAT YOU VERIFY ALL MEASUREMENTS. IT IS CRUCIAL TO DOUBLE-CHECK THE SPECIFICATIONS TO AVOID ANY DISCREPANCIES. FOR THE MOST UP-TO-DATE TECHNICAL SPECSHEETS AND CUTOUTS, KINDLY VISIT **GLASSHARDWARE.COM**.

Date: 11/05/24

Sheet N°: 1/2

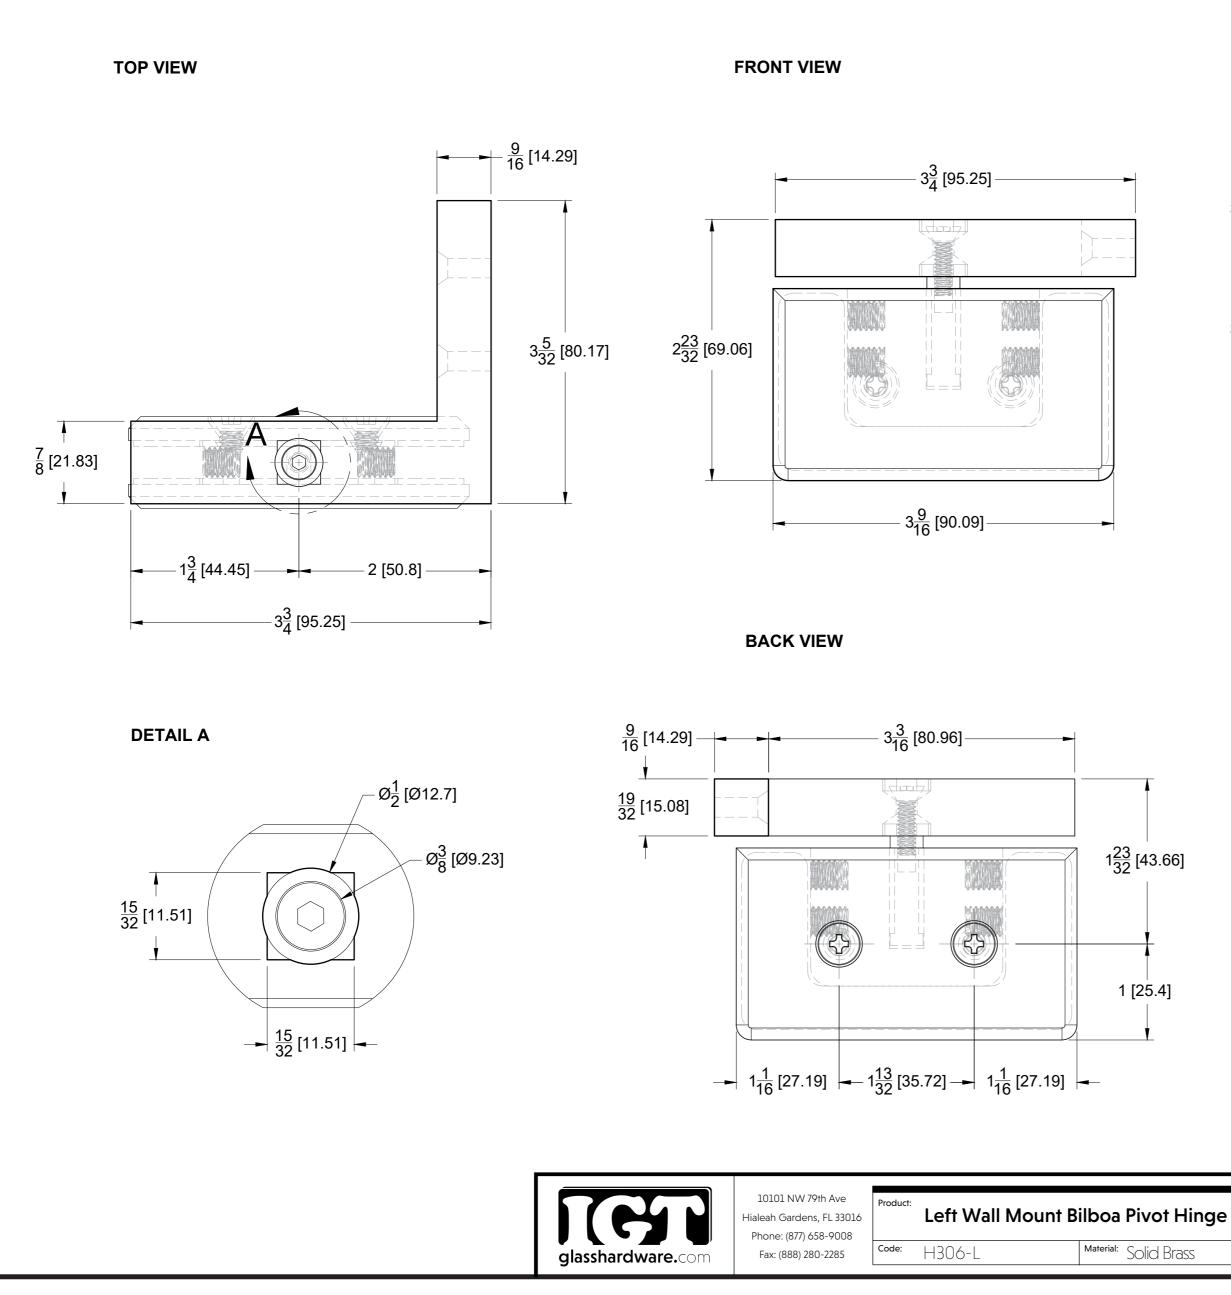

LEFT SIDE VIEW

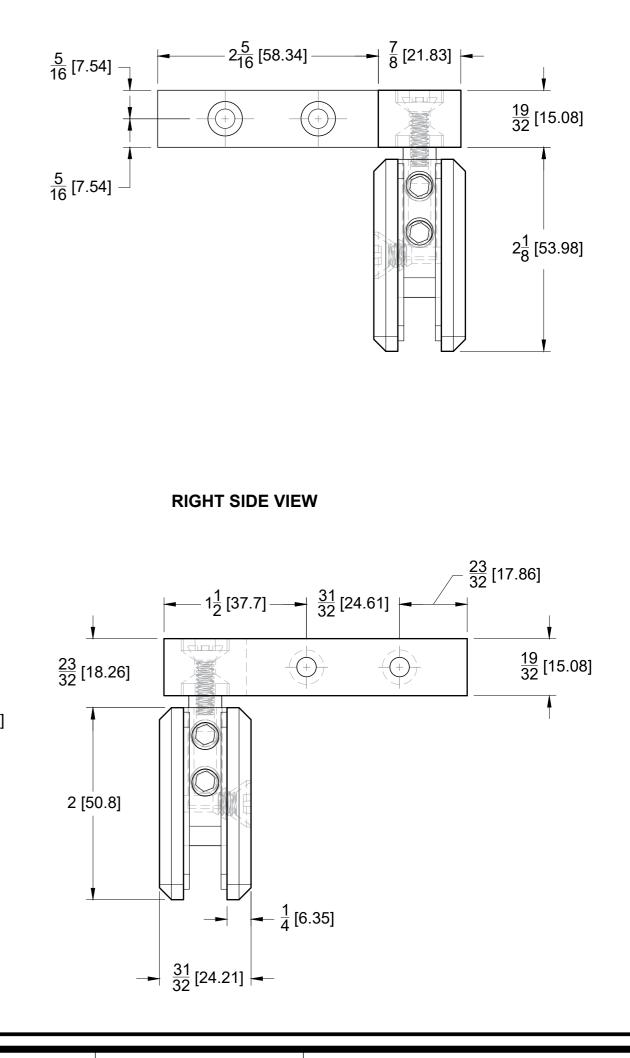

Specifications:

Glass thickness: 3/8" (10 mm) to 1/2" (12 mm). Cutout required - Tempered glass only Includes: Gaskets and screws for installation.

BEFORE PROCEEDING WITH FABRICATION, PLEASE ENSURE THAT YOU VERIFY ALL MEASUREMENTS. IT IS CRUCIAL TO DOUBLE-CHECK THE SPECIFICATIONS TO AVOID ANY DISCREPANCIES. FOR THE MOST UP-TO-DATE TECHNICAL SPECSHEETS AND CUTOUTS, KINDLY VISIT GLASSHARDWARE.COM.

Date: 11/05/24

Sheet N°: 2/2